





GEF Incorporated

FIBERGLASS CURB ANGLE

FOR USE WITH DURADEK®, DURAGRATE® AND DURAGRID®
GRATING, CUSTOM DECKING AND COVER PROFILES

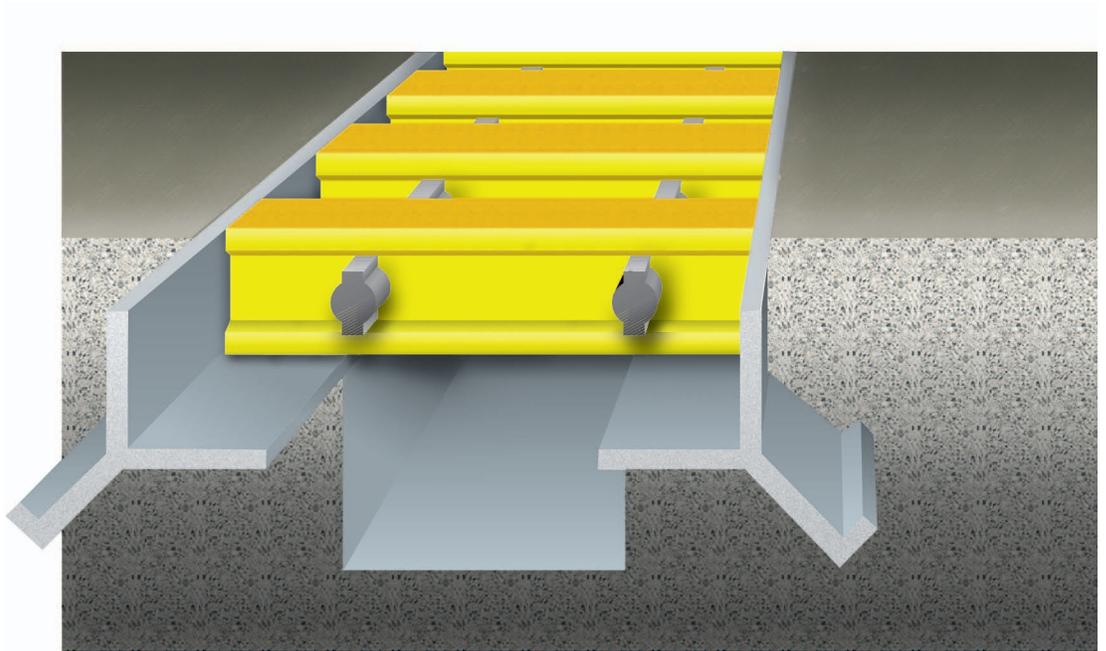

- **Corrosion Resistant**
- **Low Conductivity**
- **High Strength**
- **Fire Retardant**
- **Easy to Install**

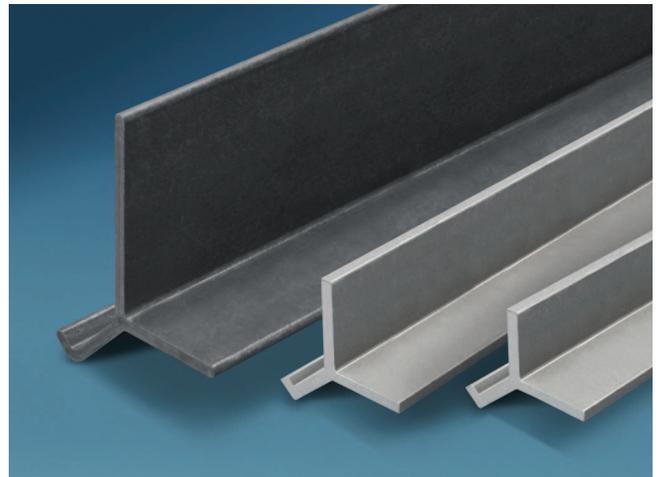

Strongwell's curb angle has a built-in, continuous angle that locks into concrete, eliminating the need for individual anchors.

Fiberglass curb angle is engineered using a surfacing veil and fire retardant gray vinyl ester, except for the 4", which is a fire retardant slate gray vinyl ester. This unique combination produces the superior strength, stiffness, wear protection and long-term corrosion resistance. Curb angle is available in 20' length.

GEF Incorporated




For pricing call: GEF Incorporated, Winfield WV (304) 755-1600

Availability


Fiberglass curb angle is available in four sizes. Other sizes can be custom manufactured. Contact Strongwell or ask your local distributor about availability.

1" Curb Angle

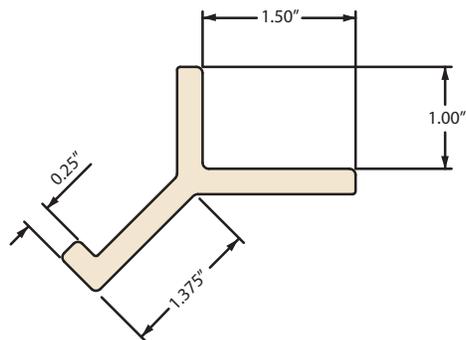


Area: 1.06 sq. in.
Weight: 0.88 lbs./ft.

1½" Curb Angle

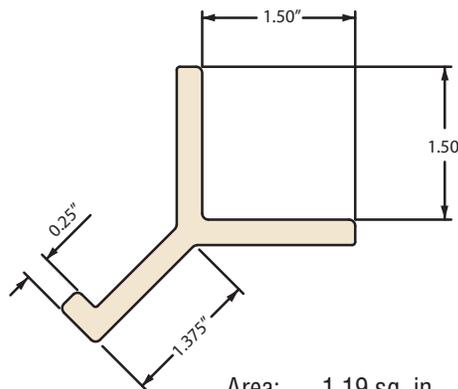


Area: 1.19 sq. in.
Weight: 0.98 lbs./ft.

2" Curb Angle

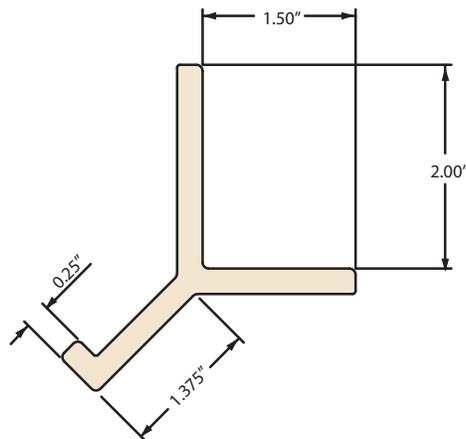

Area: 1.31 sq. in.
Weight: 1.09 lbs./ft.

4" Curb Angle

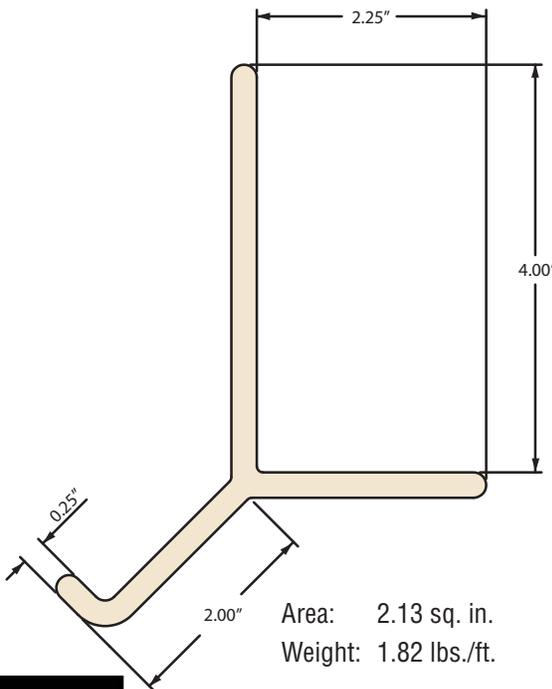

Area: 2.13 sq. in.
Weight: 1.82 lbs./ft.



GEF Incorporated

For pricing call: GEF Incorporated, Winfield WV (304) 755-1600