




GEF Incorporated

# SAFSTRIP®

## FIBER REINFORCED STRENGTHENING STRIP

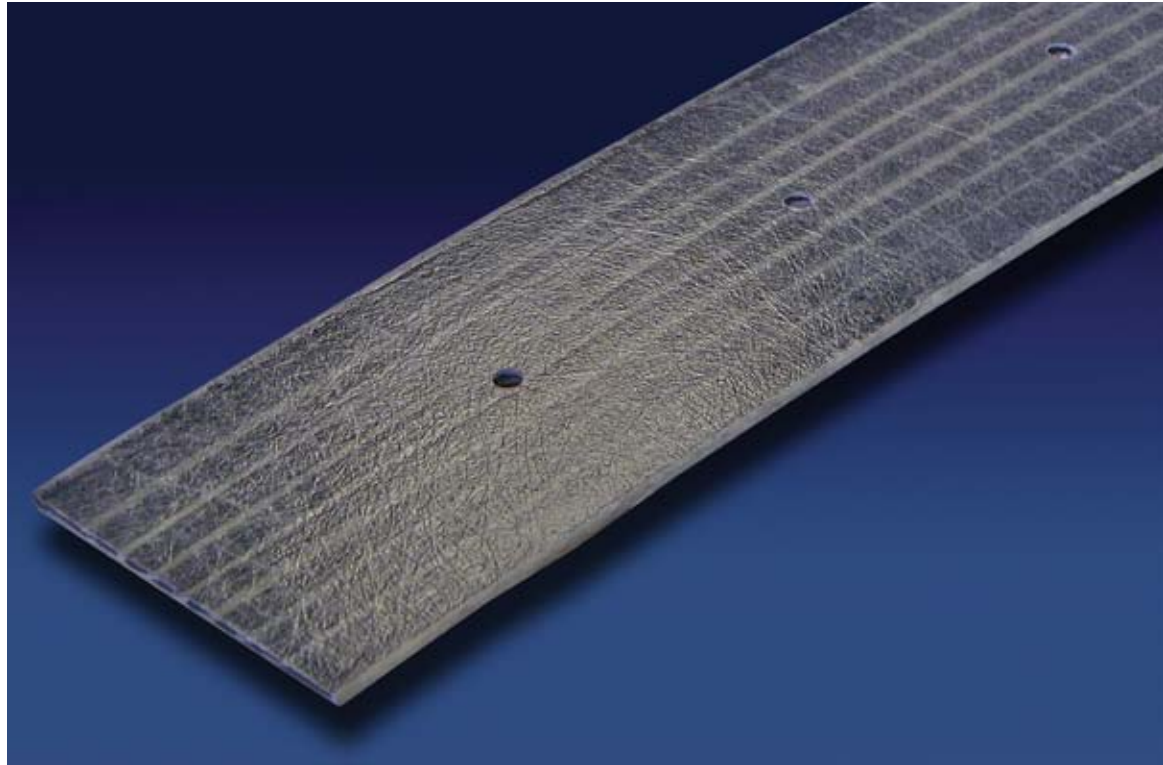

SAFSTRIP® is a pultruded composite strip that improves the strength of an existing structural member when mechanically fastened to the structure. SAFSTRIP® has high bearing and longitudinal properties and is designed to strengthen the flexural capacity on the tension face of concrete girders, slabs and decks. Installation on bridges can occur without any interruption of service.

SAFSTRIP® is supplied in rolls and may be pre-drilled with holes at the required fastener spacing to receive fasteners. SAFSTRIP® measures 4" wide x 1/8" thick and is shipped in rolls up to 100 ft. long. SAFSTRIP® is designed to be easily field cut by the customer into shorter lengths using standard carpenter tools.



### SAFSTRIP® provides these features:

- Easy to install, no skilled labor necessary
- Minimal surface preparation is needed for installation
- Structure is usable immediately after installation
- Cost effective system for increasing load capacity of bridges
- Will not split or delaminate when drilled

GEF Incorporated



## FIBER REINFORCED STRENGTHENING STRIP



Workers installed SAFSTRIP® on this bridge in Edgerton, Wisconsin, using the MF-FRP system. The load rating for the bridge increased from HS-17 to HS-25 as a result.



The posted load for this bridge that spans the Meramec River in Missouri was increased from 10 tons to 18 tons by installing SAFSTRIP® using the MF-FRP system.



The abutment and deck of this bridge in Phelps County, Missouri, was strengthened using SAFSTRIP®.

### Materials of Construction

SAFSTRIP® is composed of carbon tows sandwiched between layers of fiberglass mats and rovings. The materials are bonded together by a highly corrosion resistant vinyl ester resin. Carbon fibers increase the stiffness of the strip while glass mat provides the proper bearing strength. These combined properties allow SAFSTRIP® to be mechanically attached to a structural member. A synthetic surfacing veil is also incorporated into the composite to improve resistance to corrosion and UV degradation.

### What is MF-FRP?

SAFSTRIP® is designed to be installed using an attachment method known as mechanically-fastened fiber reinforced polymer (MF-FRP). Using this method, SAFSTRIP® is attached to an existing concrete girder, slab or deck using closely spaced powder actuated fastening pins or steel expansion anchors. The pins are applied by using a powder actuated fastener gun or other portable fastener gun. Expansion anchors are installed with a pneumatic powered torque wrench. If desired, rubber or neoprene washers may be used between the fasteners and the strip prior to inserting the fastener through the strip.

MF-FRP is an alternative to externally bonded fiber reinforced polymer (EB-FRP). As opposed to the MF-FRP system, in which the load is transferred to the composite strip through a fastener, the EB-FRP system uses an adhesive.

### Research and Development

Research and development for SAFSTRIP® was funded by the U.S. Army Engineer Research and Development Center (ERDC). Laboratory research was conducted at the University of Wisconsin Structures and Materials Testing Laboratory and at ERDC's test laboratories. Bridge demonstration projects were conducted in Wisconsin and Missouri.

### Engineering Design

The repair of concrete structures using SAFSTRIP® is dependent upon the concrete's condition. The local engineer must determine the strength of the existing concrete. It must then be determined how much SAFSTRIP® is required and the spacing of fasteners.

Design assistance can be obtained by contacting Strongwell or by using the SAFSTRIP® Design Software available on Strongwell's website. The software is a quick and easy-to-use spreadsheet which suggests hole spacing based upon the engineer's input on concrete and load conditions.


To find the SAFSTRIP® Design Software on Strongwell.com, just click "Design Tools" at the top of the page or visit the "Structural Reinforcement & Strengthening" product page.





For pricing call: GEF Incorporated, Winfield WV (304) 755-1600

## MECHANICAL PROPERTIES

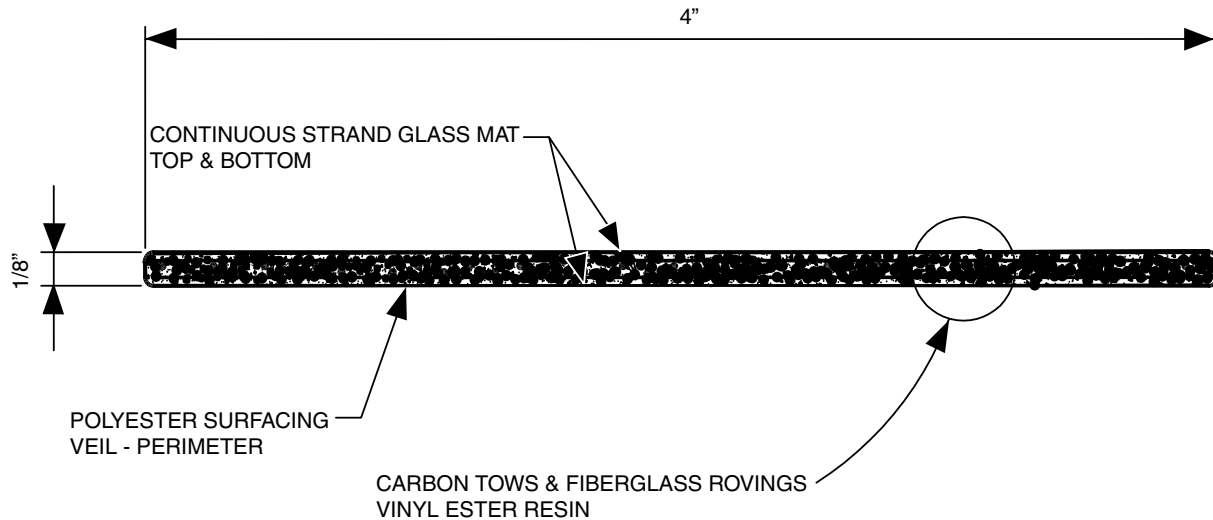

Property	Average Value <sup>1</sup>		Design Value <sup>2</sup>		ASTM Test Method
	US Units (psi)	SI Units (MPa)	US Units (psi)	SI Units (MPa)	
Tensile Strength*	123,613	852	92,902	640	D-638
Tensile Modulus** <sup>3</sup>	9.02 x 10 <sup>6</sup>	62,190	9.02 x 10 <sup>6</sup>	62,190	D-638
Clamped Bearing Strength*	50,955	351	40,540	279	D-5961
Unclamped Bearing Strength**	31,044	214	26,046	180	D-5961
Open Hole Strength*	94,641	652	78,846	543	D-5766

\* 20 Sample coupons per test series

\*\* 17 Sample coupons per test series

<sup>1</sup> Average value of test series

<sup>2</sup> Average value minus three standard deviations

<sup>3</sup> Modulus design values are not reduced in accordance with ACI 440.2R-02



As a result of a SAFSTRIP® retrofit, the existing 12-ton load posting for this bridge in Phelps County, Missouri, was removed.



This bridge, located in St. James, Missouri, was load posted at the time of strengthening. After mechanically attaching SAFSTRIP® with concrete wedge bolts and anchors, the bridge load limit was raised to 20 tons.



Severe deterioration prevented the application of a bonded strengthening system to this bridge in Pulaski County, Missouri, but MF-FRP applied SAFSTRIP® was able to repair the bridge.

**COMPARE!****MF-FRP INSTALLATION****VS.****EB-FRP INSTALLATION**

<b>FASTENING SYSTEM</b>	Mechanical - concrete wedge bolts and anchors or powder actuated fasteners.	Adhesive - usually epoxy.
<b>SURFACE PREPARATION</b>	Minimal.	Requires the time consuming process of sandblasting, cleaning and application of epoxy putty that must be ground down for a smooth surface.
<b>WEATHER CONDITIONS FOR APPLICATION</b>	No restrictions. Can be installed even during inclement weather.	Application surface must be moisture-free. Cannot be properly installed in extreme temperatures.
<b>INSTALLATION TIME</b>	Minimal - generally a few hours.	Extensive due to the surface preparation, mixing of adhesives and care required to properly apply the adhesive.
<b>LABOR COSTS</b>	Unskilled labor using standard carpenter tools for cutting and installing strips reduces labor costs.	Skilled labor required to properly prepare the surface and mix the adhesives, which results in higher labor costs.
<b>BOND STRENGTH</b>	Not highly affected by poor condition of the existing outer/superficial concrete substrate.	Dependent on the quality of the concrete substrate.
<b>AVAILABILITY OF STRUCTURE</b>	Available for immediate use upon application.	May require up to seven days to achieve full adhesive strength.
<b>DURABILITY</b>	Tests show excellent retention strength for anchor bolts. Very good fatigue strength.	Research suggests high strain gradient is found in adhesive layer where strips terminate or in proximity of substrate discontinuity (such as cracks). Debonding can be problematic.

**THE CHOICE! SAFSTRIP® MF-FRP APPLIED STRENGTHENING STRIP****STRONGWELL***ISO-9001:2000 Certified Manufacturing Plants***BRISTOL DIVISION**

400 Commonwealth Ave., P. O. Box 580, Bristol, VA 24203-0580  
 (276) 645-8000 FAX (276) 645-8132

**CHATFIELD DIVISION\***

1610 Highway 52 South, Chatfield, MN 55923-9799  
 (507) 867-3479 FAX (507) 867-4031

*\*SAFSTRIP® manufacturing location*[www.strongwell.com](http://www.strongwell.com)

INT3M0908  
 © 2008 Strongwell



For pricing call: GEF Incorporated, Winfield WV (304) 755-1600